




ZC300V/27 (BP-11/4 UV)

CAMPING CYLINDERS

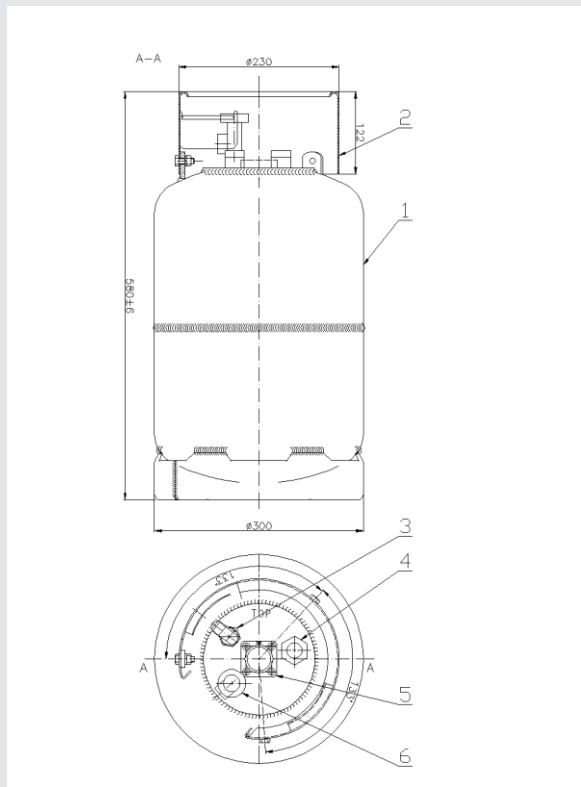

Features

ZC300V/27

| | |
|------------------------------|------------------|
| Diameter D [mm] | 300 |
| Height H [mm] | 580 |
| Capacity V [l] | 27,0 |
| Allowable filling 80% [l] | 21,6 |
| Operation temperature | -20°C - +60°C |

EXECUTION

Tanks are made in accordance with PN-EN1442 and with 2010/35/EU instruction. Tanks have safety sign π supervised by TÜV.

Cylinder operates in vertical position.

CONSTRUCTION

- 1 – cylinder
- 2 – valve guard
- 3 – filling valve
- 4 – safety valve
- 5 – level sensor
- 6 – consumption valve

TECHNICAL DATA

- capacity 27 l
- test pressure 3,0 MPa
- allowable gas filling 21,6 l (technical propane-butane)
- cylinder operates in vertical position

APPLICATION

Cylinder for gas phase consumption of propane – butane. Applicable in camping cars, as well as in services and industry.

CERTIFICATE

TÜV certificate

