




ZC300V/36

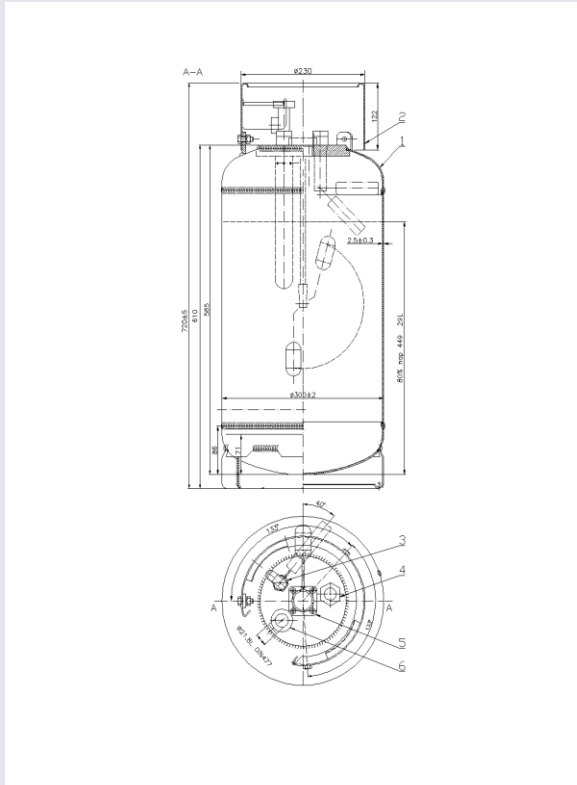

Features

ZC300V/36

Diameter D [mm]	300
Height H [mm]	720
Capacity V [l]	36,0
Allowable filling 80% [l]	28,8
Operation temperature	-20°C - +60°C

EXECUTION

Tanks are made in accordance with PN-EN1442 and with 2010/35/EU instruction. Tanks have safety sign π supervised by TÜV.

Cylinder operates in vertical position.

CONSTRUCTION

- 1 – cylinder
- 2 – valve guard
- 3 – filling valve
- 4 – safety valve
- 5 – level sensor
- 6 – consumption valve

TECHNICAL DATA

- capacity 36 l
- test pressure 3,0 MPa
- allowable gas filling 28,8 l (technical propane-butane)
- cylinder operates in vertical position

APPLICATION

Cylinder for gas phase consumption of propane – butane. Applicable in camping cars, as well as in services and industry.

CERTIFICATE

TÜV certificate

